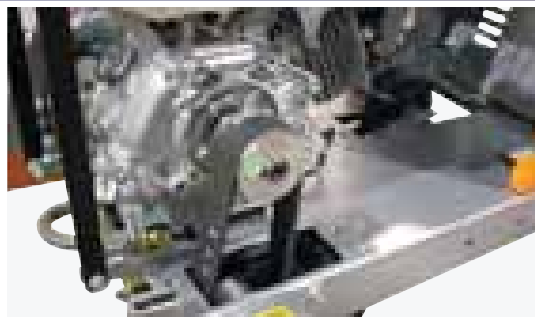


**Quick Belt Tensioning**

- Uncomplicated motor tensioning for reduced labor time with belt changes

**Four V-Belts**

- Transferring maximum power to the blade shaft


**Reinforced Frame and Axle**

- Strongest in its class

Small to medium contractor work demands performance with an economical solution. The C1320P brings the contractor the ideal saw with a heavy-duty box frame that resists bending and supported with the high-performing Honda 13HP engine. The heavy frame also provides a straighter cut. Changing or adjusting belts is simple with the single screw tensioner. The C1320P is in a class by itself.

TECHNICAL SPECIFICATIONS	C1320P
Product Number	701846 42456 1
Blade Guard Capacity – in (mm)	20" (356)
Maximum Depth of Cut – in (mm)	7-5/8" (193)
Arbor Size – in (mm)	1" (25)
Blade Flange Diameter – in (mm)	4-1/2" (114)
Blade Shaft RPM	2520 RPM
Blade Shaft Diameter – in (mm)	1-1/4" (32)
Blade Shaft Bearings	Heavy Duty Pillow Block
Blade Shaft Drive	4 Belts
Blade Guard Attachment	Pivoting, All Steel
Blade Control	Hand Wheel/Screw Feed
Axle – Front – in (mm)	3/4" (19)
Axle – Rear – in (mm)	3/4" (19)
Wheels – Front D x W x B – in (mm)	5"x2"x3/4" (127x50x19)
Wheels – Rear D x W x B – in (mm)	6"x2"x3/4" (152x50x19)
Handle Bars/Adjustment Length	20-5/8" (530)
Control	Roller Gear
Speed	0-220 FPM
Chassis	Heavy duty jig welded box frame
Power Source	Gasoline, Single Cylinder 4 Cycle
Engine Type	Honda GX390
Specifications	GX390K1QXC9
Maximum Horsepower*	13 HP (9.5kW)
Net Horsepower*	11 HP (8.2 kW)
Displacement – cu In (l)	23.7 cu in (0.39)
Bore – in (mm)	3.5" (88)
Stroke – in (mm)	2.5" (64)
Cylinders/Cycle	Single Cylinder 4 Cycle
Fuel Capacity – gal (l)	1.79 gal. (6.5 l)
Oil Capacity – qt (l)	1.16 qt. (1.1 l)
Air Filter	Four Stage Honda
Starter	Manual
Engine Cooling	Air
SAW DIMENSIONS	
Height	40" (1,016)
Minimum Saw Length (Transport) – in (mm)	56" (1,142)
Maximum Saw Length (Working) – in (mm)	114" (2,896)
Maximum Pointer Length – in (mm)	40" (1,016)
Frame Width – in (mm)	17" (432)
Saw Width – in (mm)	26" (660)
Front (Outside to Outside Wheel Width) – in (mm)	14-3/16" (360)
Rear (Outside to Outside Wheel Width) – in (mm)	15-1/4" (388)
Blade to Wall – in (mm)	2-9/16" (65)
Wheel Base Length – in (mm)	16-1/6" (407)
Blade shaft Maximum Height – in (mm)	16" (407)
Weight Crated – lbs. (kg)	345 (157kg)
Weight Uncrated – lbs (kg)	310 (141kg)

*= DATA PROVIDED BY MOTOR/ENGINE MANUFACTURER

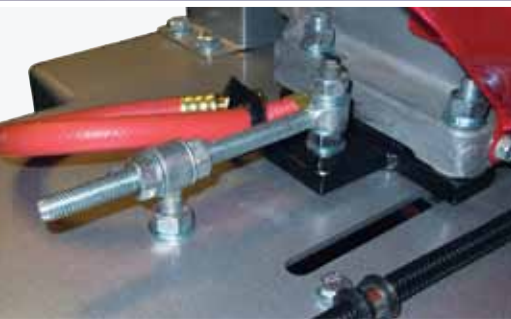**Quick Belt Tensioning**

- Provides fast and accurate belt tensioning

**Vibration Reducing Handle Bars**

- Shock-absorbing handle bars reduce vibrations up to 40%

**Fast Blade Guard Lock**

- No hassle, blade guard securing lock

The next generation of 13HP saws. The C1318P features shock-absorbing handle bars. The new sleek design of the water tank, with increased capacity and improved securing, adds an additional 1.5 gallons of water over the cut. And, a newly-designed belt tensioning system helps keep the saw cutting true and true. All these features, coupled with the Honda 13HP engine, makes the C1318P the premiere choice for rental and service work.

TECHNICAL SPECIFICATIONS	C1318P
Product Number	701846 42453 0
Blade Guard Capacity – in (mm)	18" (457)
Maximum Depth of Cut – in (mm)	6-5/8" (168)
Arbor Size – in (mm)	1" (25)
Blade Flange Diameter – in (mm)	4-1/2" (114)
Blade Shaft RPM	2,850
Blade Shaft Diameter – in (mm)	1.18" (30)
Blade Shaft Bearings	Heavy Duty Pillow Block
Blade Shaft Drive	4 Belts
Blade Guard Attachment	Hinged, All Steel
Blade Control	Hand Wheel/Screw Feed
Axle – Front – in (mm)	.78" (20)
Axle – Rear – in (mm)	.78" (20)
Wheels – Front D x W x B – in (mm)	4.92"x1.96x.78 (125x50x20)
Wheels – Rear D x W x B – in (mm)	8"x1-1/4"x.78 (203x32x20)
Handle Bars/Adjustment Length	6-1/4" (160)
Control	5.28 gal. (20 l)
Speed	Push
Chassis	Heavy Duty Steel Box with Longitudinal and Horizontal Reinforcements
Power Source	Gasoline, Single Cylinder 4 Cycle
Engine Type	Honda GX390
Specifications	GX390K1QXC9
Maximum Horsepower*	13 HP (9.5kW)
Net Horsepower*	11 HP (8.2 kW)
Displacement – cu In (l)	23.7 cu in (0.39 l)
Bore – in (mm)	3.5" (88)
Stroke – in (mm)	2.5" (64)
Cylinders/Cycle	Single Cylinder 4 Cycle
Fuel Capacity – gal (l)	1.79 gal. (6.5 l)
Oil Capacity – qt (l)	1.16 qt. (1.1 l)
Air Filter	Four Stage Cyclone
Starter	Manual
Engine Cooling	Forced Air
SAW DIMENSIONS	
Height	39" (990)
Minimum Saw Length (Transport) – in (mm)	33-1/2" (850)
Maximum Saw Length (Working) – in (mm)	61-1/2" (1,561)
Maximum Pointer Length – in (mm)	20-7/8" (528)
Frame Width – in (mm)	16-1/2" (421)
Saw Width – in (mm)	22" (609)
Front (Outside to Outside Wheel Width) – in (mm)	10-7/16" (265)
Rear (Outside to Outside Wheel Width) – in (mm)	16.89" (429)
Blade to Wall – in (mm)	4-1/2" (114)
Wheel Base Length – in (mm)	13" (332)
Blade shaft Maximum Height – in (mm)	20-1/4" (514)
Weight Crated – lbs. (kg)	240 lbs (109 kg)
Weight Uncrated – lbs (kg)	220 lbs (100 kg)

*= DATA PROVIDED BY MOTOR/ENGINE MANUFACTURER